

Blow Off Backdraft




Options for New Tables

The reason for the Blow Off Backdraft (BOB) when most people get done sanding a product they blow off the product. Thus sending the dust to another location of the plant. Migrating dust is one of OSHA's largest dust fines. Denray has designed a system that mounts to their dust tables providing the user to use proper designed blowguns to blow the dust into the BOB thus containing most all the blown dust. The top for the BOB system has different hole configuration. Designed like our tops for large panels and house doors. No worry it works just as well for small parts. The BOB units are built in 3ft and 4ft sections, making them less expensive to ship when installing onto existing table's you may already have.

(See QR code Below)

When ordering new tables with the BOB system it will come with tops as pictured below.

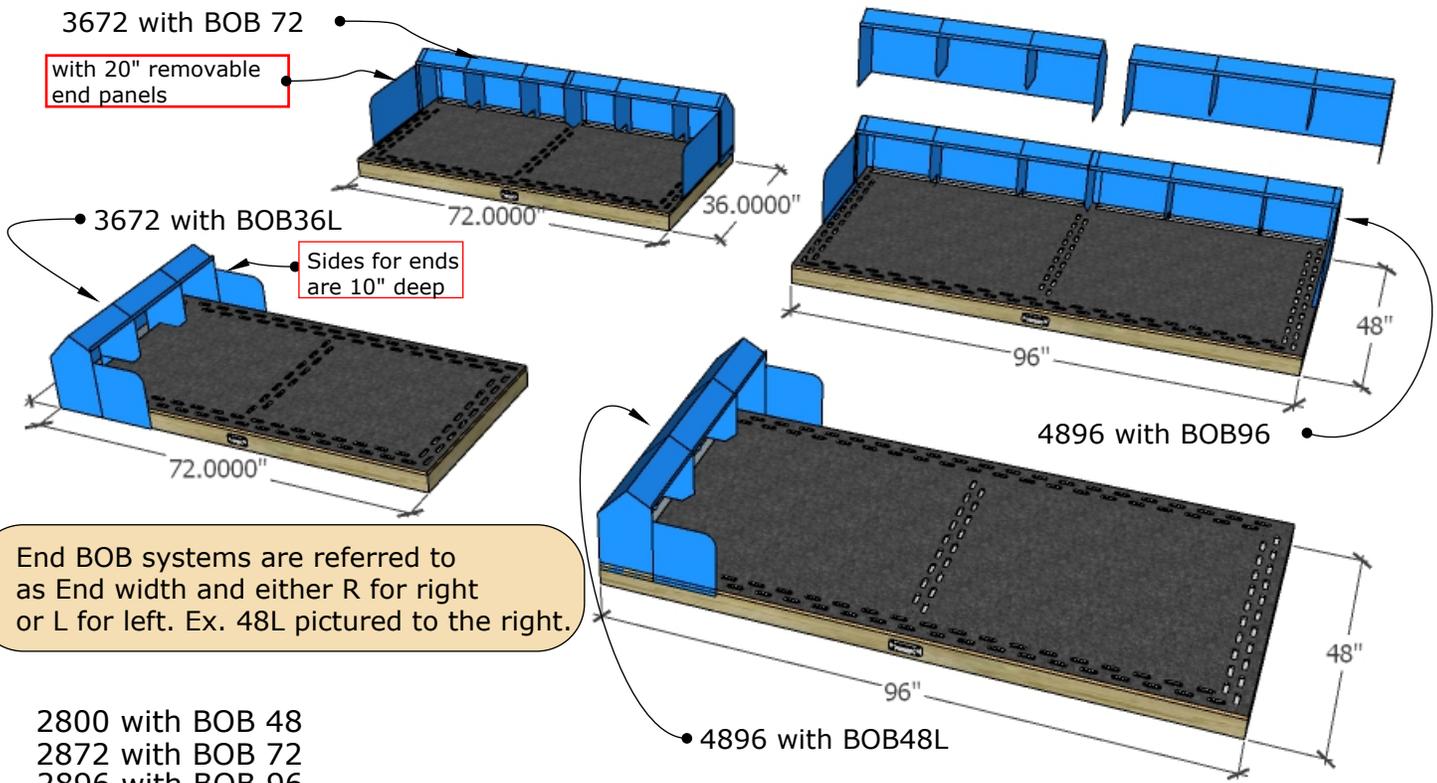

End BOB systems are referred to as End width and either R for right or L for left. Ex. 48L pictured to the right.

- 2800 with BOB 48
- 2872 with BOB 72
- 2896 with BOB 96
- 3672 with BOB 72
- 3672 with BOB 36R or 36L
- 3696 with BOB 96
- 3696 with BOB 36R or 36L
- 4800 with BOB 48
- 4800 with BOB 48R or 48L
- 4872 with BOB 72
- 4872 With BOB 48R or 48L
- 4896 with BOB 96
- 4896 with BOB 48R or 48L



Watch the Blow-off Backdraft in Action!



Blow-off Backdraft for Existing Machines



Scan to Visit Denray's Online Document Library